

Micros™

Exit Sign

The Micros™ Exit Sign is ideal for all applications from commercial to retail. This unit is made with an impact-resistant thermoplastic housing and contains universal knockout patterns on the top, back, and side to accommodate for all standard mounting styles. A NiCad battery is included with the fixture and will power the unit for a minimum of 90 minutes should the power fail. Additional faceplate and canopy are included with the fixture.



Features

Body	UV stabilized, UL94 V-0 flame retardant ABS thermoplastic Impact resistant Universal K/O chevrons White or black housing
Facing	Single, double, or universal Field-selectable directional chevrons
Mounting	Top, end, or back mount Canopy Included
Illumination	Energy-efficient super bright LED light source is paired with a color-matched diffuser providing exceptional brightness and legend uniformity
Battery	Premium grade NiCad battery (90 minute run time) standard 2.4 Volt 400 mAh NiCad (EM units) 3.6 Volt 400 mAh NiCad (SD units) 3.6 Volt 1800 mAh Ni-MH (Remote capable units)
Operating Temp	68°F to 86°F (20°C to 30°C)
Electronics	120/277 VAC 60Hz Standard Solid state transfer & charger Remote capable units provide 3.4 Watt additional runtime for 90 minutes
Self-Diagnostics	Optional Self-Diagnostic feature consistently monitors battery/charger failure, battery disconnect, and lamp failure
Warranty	3 -year limited warranty

Highlights

- Damp location rated
- Less than 2 Watt power consumption

Compliance

- ANSI/NFPA-101
- ANSI/NFPA-70
- ANSI/UL924
- ICC (IBC & IFC)
- OSHA




Micros™

Exit Sign

Product Dimensions & Details

Weight: 3 lbs. (1.36kg)

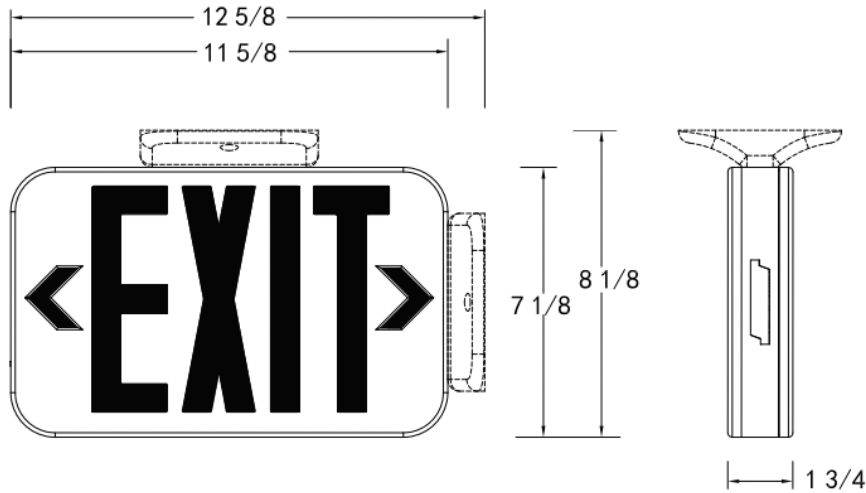

Ordering Information

Example: MES-EM-R-U-WH-RC

Series

MES = Micros™ Exit Sign

Operation

AC = AC Only

EM = Battery Backup

Legend

R = Red

G = Green

Face Count

U = Universal

Housing Frame/Color

WH = White

Options

RC = Remote Capable

SD = Self Diagnostics

Power Consumption

Power Input: 120/277 VAC

Operation	Max Watts
Battery Backup Red	1.78/1.88
Battery Backup Green	1.49/1.57
Battery Backup Red – Remote	3.60/4.14
Battery Backup Green – Remote	3.28/3.81
Battery Backup Red – SD	3.0/3.1
Battery Backup Green – SD	3.3/3.4
Battery Backup Red – Remote SD	2.8/2.8
Battery Backup Green – Remote SD	3.0/3.0
Red – AC Only	1.64/1.60
Green – AC Only	1.52/1.48

The Exit Store LLC
 303 W Lancaster Ave #138
 Wayne, PA 19087
 Toll Free: 844-438-3948 [844-GET-EXIT]
 Tel: 484-913-1916
 Fax: 484-913-1919
 sales@theexitstore.com

www.theexitstore.com